

A STUDY ON THE FACTORS AFFECTING THE ECONOMICAL LIFE OF HEAVY CONSTRUCTION EQUIPMENT

Hongqin Fan and Zhigang Jin

Department of Building and Real Estate, The Hong Kong Polytechnic University, Kowloon, Hong Kong

* *Corresponding author (bshfan@inet.polyu.edu.hk)*

ABSTRACT: Surveys found that large contractors replace approximately 10% of their equipment fleet units annually in North America. Cost minimization model is a commonly accepted method for equipment replacement which helps to identify these equipment units whose total owning and operating cost reaches their minimum point as candidates for replacement. While the model is conceptually clear with the aim of achieving minimum equipment cost per unit of service, its use has some practical difficulties as the equipment maintenance and repair costs experience bumps and lumps in the its life time. In practice, identification of equipment units for replacement are still based on such metrics as limit of repair costs, limit of major failures, lessons learned from previous cases as well as expert knowledge. In this research, we look into the cost history of a large number of equipment units in a contractor's equipment management information system (MIS) and use decision tree modeling approach to identify these factors impacting on the economic life of first hand equipment, and extract rules leading to different cost patterns and therefore different economic life spans of heavy equipment. C4.5 decision tree model is used to build a top-down decision tree by recursively splitting existing cases based on the concept of information gain. In addition to facilitating decisions in equipment replacement, the findings can also be used to explain the effectiveness of various maintenance strategies, compare the equipment cost performance among various classes, makes, and amount of services in their life cycle.

Keywords: *Construction Equipment, Replacement Analysis, Decision Tree Modeling, Decision Support*

1. INTRODUCTION

Heavy construction equipment fleet is a critical resource for large contractors. To keep competitive in the market, the contractor needs to identify these candidates of equipment items for timely replacement. A survey found that nearly 10% of the equipment needs to be replaced annually on average in USA [4]. Although there are many equipment replacement theories, such as cost minimization models, their practical use is rare as the total annual cost every equipment item shows significant bumps and lumps, it is also difficult to model the trend of equipment cost to define the most likely economical life for a particular type of equipment under the dynamic influences of multiple factors.

This paper introduces a machine learning approach to address the equipment replacement problem. Decision tree induction algorithm C4.5 proposed by Ross Quinlan [3] is used to perform inductive learning from the real equipment cost data. A decision tree model is derived for describing the rule sets leading to different cost cohorts. Combined with traditional mathematical and statistical approaches, the decision tree model can effectively evaluate these factors of impact on the fluctuation of equipment costs, and identify the equipment candidates for replacement based on their cost-related features.

2. LITERATURE REVIEW

Cost minimization method, first proposed by Taylor [5], is one of the earliest approaches for equipment replacement and is well accepted in academia and construction, agriculture and forestry industries. This method aims to minimize the annual owning and operating cost of a piece of equipment per unit of service: the equipment annual costs drop sharply in the first few years due to high depreciation, and rise gradually in the following years when the equipment repair costs escalate due to equipment aging, tear and wear. The method relies on various theoretical cost models to predict the future costs and identify the point of time at which the annual unit cost reaches its minimum.

Many mathematical and statistical models are proposed for practical use in equipment replacement. Collier and Jacques [1] proposed a “Geometric Gradient-to-Infinite-Horizon method”, for projecting expected future life-cycle costs for the existing machine plus future replacements to an infinite horizon; Vorster and Sears [6] suggested to use failure cost profiles for consequential costs of equipment failures and incorporated into the equipment cost model for equipment replacement. Gillerspie et al. [2] addressed the equipment replacement in a research project by the Virginia Transportation Research Council in corporation with U.S. Department of Transportation, the focus of their research is on the prediction of annual variable costs of a piece of equipment using statistical approaches, however the researcher acknowledged the difficulties in the inclusion of large number of attributes into the predictor variables, as well as the tedious trial and error method in statistical analysis.

3. PROBLEM STATEMENT

A general contractor owns a large fleet of equipment to satisfy the needs for equipment resources in its civil and transportation projects. The contractor notices there are large variations of economic life spans for different types of equipment; and these variations also exist for the same class of equipment with different make, preventive maintenance (PM) history, accumulated unit of services

(hours or kilometers), etc. The current annual equipment replacement exercise focuses on the metrics of maximum equipment use and the accumulated repair costs and personal judgment. The statistical cost information on equipment groups is useful but not specific enough to guide the equipment replacement. Replacing a piece of equipment too early or too late is obviously a problem that will increase the equipment “internal rate” charged to projects and decrease the contractor’s competitive edge in the equipment-intensive heavy construction market.

Take the fleet of dump trucks as an example, the contractor needs to know what caused the discrepancy between the manufacturer’s recommended life and the actual life in the contractor’s fleet, and how the combination of the influencing factors reduce or increase the equipment life span. If the impact from these factors can be characterized, the equipment replacement can be done with more confidence and less guesswork. The future purchase of new equipment can also benefit from these findings, for example, comparison between different makes/models under specified conditions.

4. DECISION TREE INDUCTION: C4.5 ALGORITHM

Decision tree induction is one category of machine learning algorithm for building a decision tree structure linking different decision conditions with different results. A decision tree is a top-down structure with the root node at the top, questions are asked with different answers leading to the next level decision nodes or terminal leaf nodes. With a tree-like multi-level structure, decision tree is equivalent to a set of decision questions asked consecutively and a combination of different questions/answers lead to different results.

Building decision tree from data is an inductive learning process, a supervised learning algorithm is used to repetitively partition the data space into subset of data with more purer results. One major different between different decision tree algorithms is how to search for attribute/value pairs for splitting the data space. C4.5

algorithm uses information gain to judge which attribute and which value to use for data splitting, which is defined in the following equations:

Entropy: the degree of purity in the dataset, does the dataset contain pure or ambiguous information on classification results?

$$Entropy(S) = \sum_{i=1}^c -p_i \log_2 p_i \dots\dots\dots[1]$$

Where p_i is the proportion of original dataset S belonging to Class i , c is the number of classes

Information gain: the amount of information increase in the dataset after knowing attribute A of dataset S

$$Gain(S, A) = Entropy(S) - \sum_{v \in Values(A)} \frac{|S_v|}{|S|} Entropy(S_v) \dots\dots\dots[2]$$

Where values (A) is the set of all possible values for attribute A , S_v is the subset of S for which attribute A has value v .

Split Information: the amount of information in the dataset after partitioning by c -valued attribute A

$$SplitInformation = -\sum_{i=1}^c \frac{|S_i|}{|S|} \log_2 \left(\frac{|S_i|}{|S|} \right) \dots\dots\dots[3]$$

Where $S_1 \sim S_c$ are the c subsets of examples resulting from partitioning S by the c -valued attribute A .

Information gain ratio: the ratio between information gain and split information

$$GainRatio(S, A) = \frac{Gain(S, A)}{SplitInformation(S, A)} \dots\dots[4]$$

This gain ratio is used to select criteria for splitting dataset S into subsets. From the root node, the C4.5 algorithm scans over the dataset with various splitting options : different attributes and different splitting values (for example, a conjunction of the attribute “equipment age” and value “5” composes a decision question “if the equipment age is less than 5 years”). The splitting criteria leading to the largest information gain ratio indicates the best combination of attribute and splitting values, or the best partitioning of dataset with subsets containing pure

and consistent information on equipment costs. The same splitting process is repeated on the subsets of data or child nodes for further growing of trees down the paths, if the termination criteria are satisfied (too few number of cases or sufficiently pure information in the node) and take the child nodes as leaf nodes in the tree structure, otherwise, take the child node as a decision node and continue the splitting process until all the nodes are terminal leaf nodes.

5. MODELING OF THE EQUIPMENT M&R COST USING C4.5 DECISION TREE ALGORITHM

Among all the owning and operating cost items, maintenance and repair (M&R) costs are the most uncertain element which is the most difficult to predict. The M&R costs cover such items as preventive maintenance, work order repairs (repairs at the shop), and running repairs (repairs on the shift). The spending is necessary to keep the equipment running with maintenance actions and timely repairs. The predictive model on the annual equipment M&R cost is trained, validated and used to facilitate equipment replacement analysis.

Data preparation

The M&R cost model is learned from a large collection of equipment data on a group of 180 units of dump trucks with capacities of 6 tons and above, with the following features:

- The dump trucks belong to different operational divisions of the contractor
 - 8 factors of potential impact on equipment M&R cost are selected and shown in Table 1
 - The annual M&R costs of these units are collected for the years 2006-2010 for study
- Inclusion of correlated variables tends to overestimate the contributions from one factor and make the model unstable, showing phenomena of multicollinearity. A simple correlation analysis found that the AnnualKM and AnnualFuelCost are highly correlated, with a correlation factor of 0.89, therefore the Annual fuel volume is reserved as a more accurate measurement of equipment

service as it takes the truck load level and environment conditions into consideration.

Tab. 1 Attributes for equipment group “Dump trucks, 6 tons and above”

Factors of Impact		Description
Nr	Predictor Variables	
1	Age, numerical variable	age of the equipment unit, in years
2	Manufacturer, categorical variable	Manufacturer of the equipment unit
4	Division, categorical variable	Operating division of the contractor
5	Class, categorical variable	Class of equipment
6	AnnualPMcost, numerical variable	Annual preventive maintenance cost, in 2006 constant dollars
7	AnnualKM, numerical variable	Annual travelling distance, odometer readings difference from year start to end, in Kilometers
8	AnnualFuelCost, numerical variable	Annual accumulated fuel cost, in 2006 constant dollars

For the study period 2006~2010, the annual average equipment M&R cost distribution over their age is shown in Figure 1. The annual cost change patterns are difficult to describe except for cost fluctuations from overhaul every 3~5 years. For individual pieces of trucks, this is more difficult to characterize as it shows great variations over its ages.

To model the annual Total M&R cost using C4.5, the cost data for each case is discretized into five cohorts indicated by 1-very low,2-low, 3-average,4- high, 5-very high, with equal frequency.

Modeling and Validation

Model is trained using C4.5 algorithm, and Figure 2 shows the partial model after training. The minimum number of cases in the leaf node is set to 10, and the figure shows only a few top level decision nodes due to the space limit.

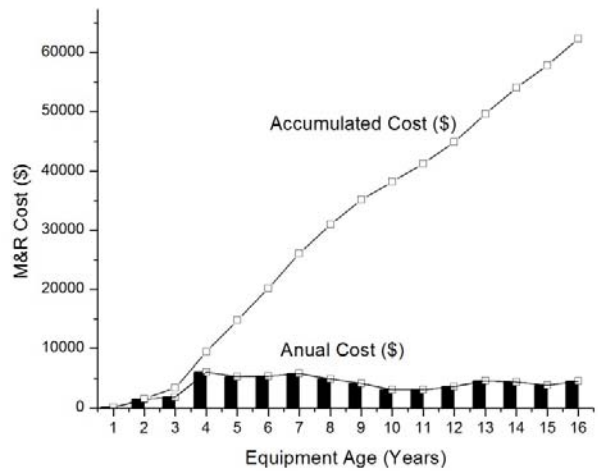


Fig. 1 Annual Average Equipment M&R Cost versus Equipment Age

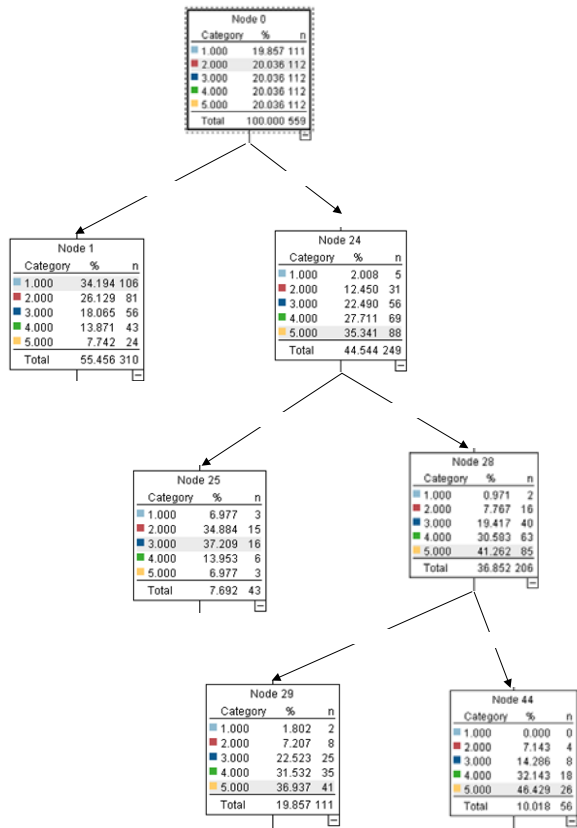


Fig. 2 Partial Decision Tree Model for the annual M&R Cost

10-fold cross validation is used to validate the accuracy and stability of the model. The dataset is randomly divided into 10 subsets with equal number of cases, with one subset of data reserved for validation and the remaining 90% (nine subsets) used for training. Repeat the above

training and validation for each subset for a total of 10 different times.

The average prediction accuracy is 73.18%, see Table 2 for the confusion matrix table. The rows show the actual M&R cost cohorts, and the columns show the predicted cohorts.

The decision tree structure is also transformed into a set of rules, 30 rules are generated from the decision trees by tracking down each path of the decision tree from the root node. The following shows a few of the identified interesting rules:

- For dump trucks of 8-12 years age, and from manufacturer “A”, if the consumed fuel volume is more than 7,831 liters, the annual M&R cost is very high;
- For dump trucks from Manufacturer “B”, if the consumed fuel volume is between 2,397 and 7,831 liters, and the total PM hours is less than 209, the annual M&R cost is low
- For dump trucks from Manufacturer “C”, if the consumed fuel volume is more than 7,831 liters, and the total PM hours is more than 180, the annual M&R cost is low or very low

Table 2: Confusion Matrix Table

		Predicted Annual M&R Cost Cohorts					Accuracy
		very low	low	average	high	very high	
Actual Annual M&R Cost Cohorts	very low	91	13	2	4	1	82.00%
	low	12	80	9	9	2	71.40%
	average	6	9	79	10	8	70.54%
	high	2	5	4	77	24	68.75%
	very high	9	0	9	12	82	73.21%

Nevertheless, not all the rule sets are interesting, some are classified as common knowledge or merely imply a fact but does not convey sufficient information for decision actions.

Another important output from the algorithm is the ranking of factors. As shown in Table 3, the most important factors

influencing the annual M&R cost include Fuel volume consumed, elapsing age, manufacturer, and the total PM hours.

The importance of each input variable is measured by the ratio of information gain and the original amount of information in the original dataset with respect to the M&R cost cohorts, as calculated by the following definition:

$$\text{Index of Importance} = \frac{\text{Gain}(S, A)}{\text{Entropy}(S)} \dots\dots\dots[5]$$

The ranking of factors based on their index of importance is summarized in Table 3.

Tab. 3 Ranking of Factors of Impact based on Their Index of Importance

Nr	Nodes	Index of Importance
1	FuelVolume	0.604
2	Age	0.282
3	Manufacturer	0.093
4	PMTotal	0.022

Apart from their influence in the tree building through data partitioning, these factors contain important information on the equipment M&R cost. *Fuel volume consumed* is a dominant indicator for the M&R cost, as it is related to the amount of service delivered by the equipment. As equipment rate of use is going down with its increasing age, elapsed time (*Age*) is a predictor not as good as the fuel volume, although it is also an important factor that must be accounted for. *Manufacturer* is an important indicator as equipment units from some manufacturers is more reliable than their counterparts, or some units perform poor with extended life span. The *total PM hours* are important but they do not change significantly the M&R cost so long as the manufacturer’s recommended PM programs are followed. As more vigorous PM programme is not included in this dataset, their effects cannot be reflected in the results. *Division* and *Class* are not shown in the table as their indexes of importance are

close to zero, showing they do not have any impact on the equipment cost fluctuations.

6. DISCUSSIONS ON THE M&R COST MODEL

The derived M&R cost model is very useful for discovering interesting rules for equipment replacement decision support as the rule sets quantify the effects on cost change patterns caused by the various factors of impact. These inherent rules are difficult to identify by domain experts.

The identified rules can help to conduct the equipment replacement analysis on a particular piece of equipment. For a particular piece of equipment, identified rules can help the decision maker to predict the equipment M&R cost level in the coming years. Although it is not possible to predict the future M&R cost with a very high accuracy, the model can incorporate the influencing factors and improve the prediction results with significant improvement.

Other typical use of identified interesting rules sets include: comparison of equipment cost performance among manufacturers during the expected life span; comparison of equipment PM strategies by evaluating if improved PM frequencies really could help to reduce the equipment repair costs for a certain group of equipment.

The most interesting rules identified are these on the lowest cohort (1) and these on the highest cohort (5) of the annual M&R cost. By contrasting these combined conditions leading to the most desirable and the worst case scenarios, the decision makers can learn lessons and improve their practice in equipment maintenance management.

7. CONCLUSIONS

The paper summarizes our research on the descriptive and predictive analysis of equipment M&R cost and its influencing factors using C4.5 decision Tree induction algorithm. Decision rules can be generated from the existing equipment data for decision support in equipment replacement. Factors of impact on the variations of

equipment M&R cost are identified, prioritized, and used for decision analysis. The research supplements the traditional equipment replacement theory by combining the fact-based cost-related rules into the traditional equipment replacement models, reducing the uncertainties and hypothesis involved in practical applications.

8. ACKNOWLEDGMENT

The research is supported by the General Research Fund (GRF) Nr. 517009 of Research Grant Council, Hong Kong SAR, China

REFERENCES

- [1] Collier, C. A. and Jacques, D. E., "Optimum Equipment Life by minimum Life-cycle Costs", *Journal of Construction Engineering and Management*, ASCE, Vol. 110, No. 2, pp.248-265, 1984
- [2] Gillerspie, J.S. and Hyde A. S., *The replacement/repair decision for heavy equipment*, Report VTRC 05-R8, Virginia Transportation Research Council, November 2004.
- [3] Quinlan, J. R., *C4.5: Programs for Machine Learning*. Morgan Kaufmann Publishers, Mateo, CA., 1993
- [4] Reed Business Information, *Annual Report and Forecast. Supplement to Construction Equipment*, January 2007 issue, New York, NY.
- [5] Taylor, J. S., "A Statistical Theory of Depreciation Based on Units Cost", *Journal of the American Statistical Association*, pp.1010-1023, 1923
- [6] Vorster, M.C. and Sears, G.A., "Model for Retiring, Replacing, or Reassigning Construction Equipment", *Journal of Construction Engineering and Management*, ASCE, Vol. 113(1), pp.125-137, 1987